


# GAINSBOROUGH™

## ROUND DUAL OUTLET SHOWER

HP/COMBI

GDRE

### DIMENSIONAL DRAWINGS

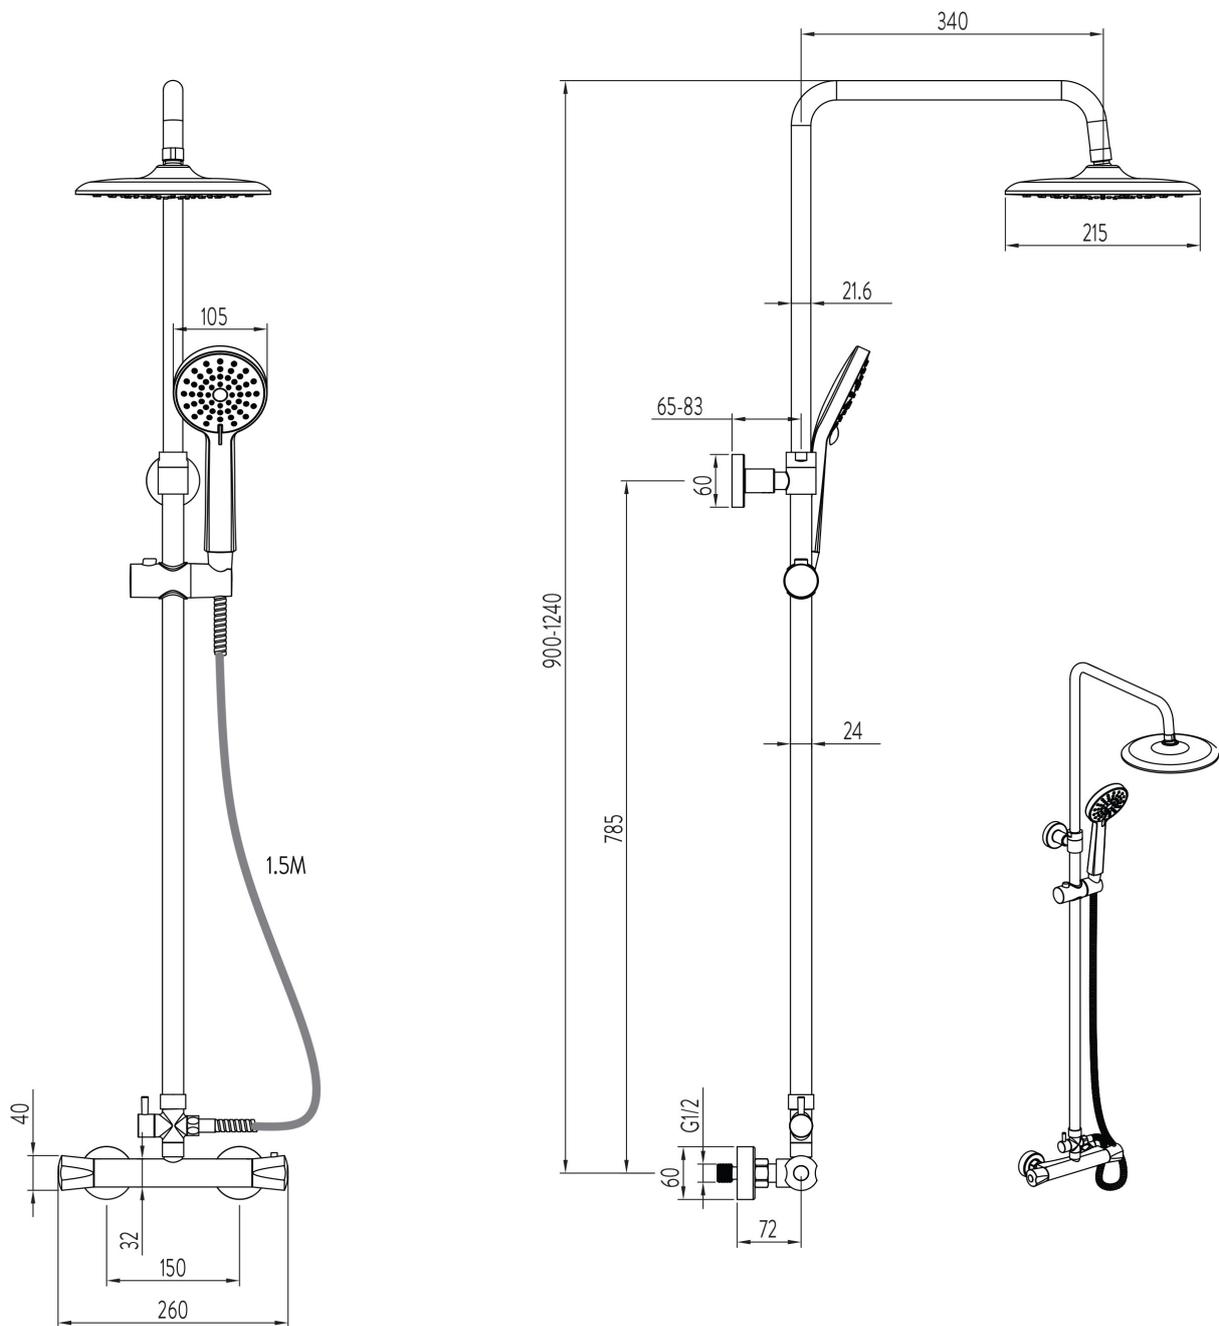



# GAINSBOROUGH™

## ROUND DUAL OUTLET SHOWER



GDRE

HP/COMBI

---

### TECHNICAL SPECIFICATIONS

Minimum pressure requirements	1 Bar
Maximum pressure requirements	5 Bar
Inlet fitting connections	3/4" Threaded
Rear inlet supply positions	Hot/left, cold/right (as viewed from the front)
Hose connection	1/2" Thread
Valve inlet centres	150mm centres
Supply temperature	Hot Water Maximum: 65°C. Cold Water Minimum: 5°C
Water system	Combination boiler, balanced high pressure and gravity boosted (pumped) systems
Features	Thermostatic temperature control with override button for extra safety
	Quality metal diverter
	Flow control with separate diverter to switch between shower heads
	Includes offset inlet elbow to accommodate pipe centres 132mm - 168mm
	Soft rub shower head nozzles for easy cleaning
	Adjustable head: 3 spray patterns. Drencher head: single mode
	Height adjustable telescopic shower column 900mm - 1240mm (see dimensional drawing)
	Adjustable height push button handset holder with angular handset adjustment
	215mm drencher head, 105mm adjustable head
1.5m chrome plated stainless steel hose	
Colour	Chrome
Guarantee period	5 years parts & 2 years labour (heads, hoses, holders & rails covered for 2 years only)